SHARK

Shark Handgun Spray Version

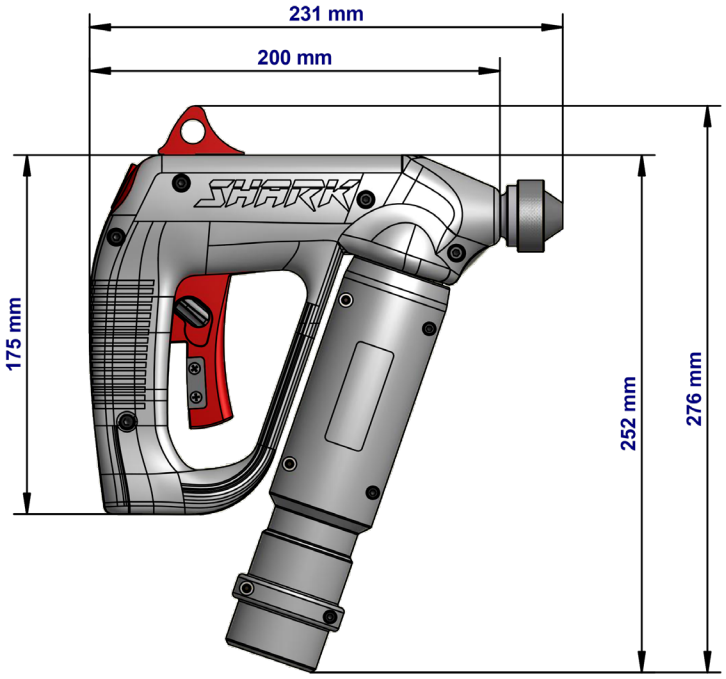

GENERAL FEATURES

VERSION	Extrusion SPRAY nozzle (S version)
ADHESIVE TYPOLOGY	Hot-melt
ADHESIVE VISCOSITY	Up to 70.000 Cps
WORKING TEMPERATURE	50°C÷210°C (120°F÷410°F)
WEIGHT (WITHOUT HOSE)	1000 grams (2,2 lb)
WARM-UP TIME	20' starting from room temperature (0°C÷45°C (32°F÷113°F)
VOLTAGE	1/N/PE AC 230 V ± 10% 50/60 Hz
INSTALLED POWER	150 W (0,8 A)
TEMPERATURE CONTROL	PT100 ±0,5°C (1°F)
MAX WORKING PRESSURE	60 bar
ROTATION ANGLE	360°
ACTIVATION MODE	Via trigger with safety catch
FITTING	1/2"-20 UNF (Tank Side) - 9/16"-18 UNF (Gun Side)
AVAILABLE TYPE OF NOZZLES	Diameter 0,30 - 2,00 mm
AVAILABLE HOSES	HM-S series 2,8 mt (9 ft) - 3,6 mt (12 ft) - 4,8 mt (16 ft)
TYPE OF PROTECTION	IP42 (Protection Class I - Potential Earth - Accordingly DIN VDE 0720)